

CERACOAT JB - 550

Hard Coating

It has excellent scratch resistance and high hardness if it coated for Hard Coating's Top Coat.

용도

1. Film
2. Plastic

성상

Color : Transparent
 Viscosity : 15~25 cps
 Main Ingredient : Glycol Type, Water, etc
 pH : 5~6
 Active Content (%) : 35~40




특성

1. Higher wear resistance for plastic products
2. Primer process with JB-520

처리공정

Coating Method : Curing Condition
 - Dipping : Dry 120°C~150°C : 3~5min
 - Spray
 - Rolling

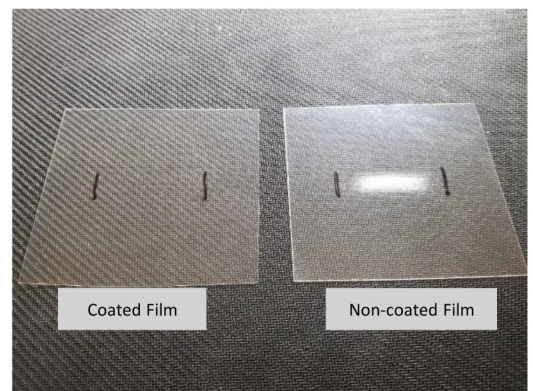

Steel wool test

FEWM Co., Ltd.

Address : C-703, 338, Gwangyojungang-ro Suji-gu,
 Yongin-si, Gyeonggi-do
 (Sanghyeon-dong, Gwanggyo Woomi NEWV) (16942)

Tel. : +82-31-221-6782

Fax : +82-31-221-6783

E-Mail : help@fewm.co.kr